



Industrial Acoustic Imaging Camera

FLIR Si124™

The FLIR Si124 is an intelligent, easy-to-use imaging system designed to visually show pressurized leaks in compressed air systems and display partial discharge problems in high-voltage electrical systems. This lightweight, one-handed solution can help utility, manufacturing, and engineering professionals identify efficiency loss and potential failures up to 10 times faster than traditional methods. Built with 124 microphones and a frequency range that covers audible and ultrasound (2 kHz to 31 kHz), the Si124 sees through background noise commonly found in industrial environments to produce precise acoustic imagery. The acoustic image is overlaid in real time on top of a digital camera picture, which allows the user to accurately pinpoint the source of the sound and classify problems. Equipped with the FLIR Acoustic Camera Viewer cloud service, this smart tool automatically saves images to the cloud after they are captured. Users can then access stored files for deeper analysis. Adopting the FLIR Si124 as part of a regular maintenance routine, professionals can identify issues fast – helping utilities keep the power flowing and manufacturing operations going.

www.flir.com/si124



FIND LEAKS 10X FASTER

Reduce electricity waste and optimize equipment performance


- Pinpoint costly leaks in noisy industrial environments
- Instantly view the leak rate (l/min or CFM) and estimated yearly energy loss
- Extend compressor life by eliminating wasted output



SEE THE SOUND OF PD AND CORONA

Minimize equipment failures and downtime that result from PD/corona issues

- Classify partial discharge type (including surface discharge, floating discharge, and discharge into air) to improve reliability of electrical systems
- Identify corona discharge, even in the daytime, allowing quick replacement of defective components before a catastrophic failure
- Operate the lightweight camera with one hand

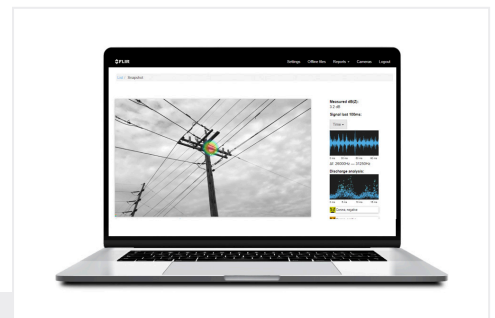

VISUALIZE, CLASSIFY, QUANTIFY

Calculate critical decision-making data instantly with cloud analytics software

- Upload, store, and back up data; create reports; and conduct deep analysis using FLIR Acoustic Camera Viewer cloud analytics
- Quickly calculate estimated yearly energy expense caused by a compressed air/vacuum leak
- Determine if service or replacement is necessary by classifying PD/corona types instantly

SPECIFICATIONS

| Acoustic specifications | | Si124 |
|---|---|-------|
| Acoustic measurement | 124 low-noise MEMS microphones, real-time sound visualization | |
| Sensitivity, accuracy | <0 dB | |
| Dynamic range | >120 dB | |
| Bandwidth | 2 kHz to 31 kHz, adjustable range | |
| Distance | From 0.3 m (1.0 ft) up to 100 m (328 ft) | |
| Compressor / Vacuum Leak Rates | In typical industrial environment: <ul style="list-style-type: none"> • >0.032 l/min @ 3 bar from 3 m (9.8 ft) • >0.05 l/min @ 3 bar from 10 m (32.8 ft) Absolute minimum detection in quiet environment: 0.016 l/min @ 1.2 bar from 0.3 m (1.0 ft) | |
| Electrical discharge classification | <ul style="list-style-type: none"> • Discharge into air • Surface discharge • Floating discharge | |
| User interface | | |
| Display | Size: 5 in, 800 × 480 Color: 24 bit RGB Brightness: 1000 cd/m ² (adjustable) | |
| Input device | Resistive touchscreen | |
| Power On indicator | Red LED | |
| Video image resolution | 1640 × 1234 | |
| Video frame rate | 25 fps | |
| Acoustic image frame rate | 30 fps | |
| Zoom | 2x digital zoom | |
| Communication and data storage | | |
| Wireless data transfer | Wi-Fi 2.4 GHz and 5 GHz IEEE 802.11.b/g/n/ac wireless LAN | |
| Storage, internal | 32 GB SD card, non-removable | |
| Storage, external | 8 GB USB mass storage, provided with device | |
| Power supply | | |
| Nominal input voltage | 12 V Max input: 15 V 2 A | |
| External battery | LiFePO 12 V 7 Ah, 84 Wh Usage: 7 h (depends on ambient conditions) Charge time: 4 to 6 h | |
| Battery charger | Input: 100-240 V ~ 50/60Hz 1.5 A Max output: 13.8 V, 4.0 A | |
| Internal battery (only for camera backup use) | Li-Ion 6 Wh | |

| Environmental | |
|---|---|
| Operating and storage temperature range | Recommended -10°C to 50°C (14°F to 122°F) |
| Operating and storage humidity | Recommended 0 to 90% |
| Physical data | |
| Camera size | 273 × 170 × 125 mm (10.7 × 6.7 × 4.9 in) |
| Camera weight | Camera: 980 g (2.2 lb) |
| Battery size | 90 × 145 × 65 mm (3.5 × 5.7 × 2.6 in) |
| Battery weight | 985 g (2.2 lb) |
| Total weight, incl. all accessories | 2.9 kg (6.4 lb) |
| Battery cord length | 0.9 m (3.0 ft), extended 2 m (6.6 ft) |
| Included in the Box | |



Specifications are subject to change without notice. For the most up-to-date specs, go to www.flir.com

CORPORATE HEADQUARTERS
 FLIR Systems, Inc.
 27700 SW Parkway Ave.
 Wilsonville, OR 97070
 USA
 PH: +1 866.477.3687

LATIN AMERICA
 FLIR Systems Brasil
 Av. Antonio Bardella, 320
 Sorocaba, SP 18085-852
 Brasil
 PH: +55 15 3238 8070

NASHUA
 FLIR Systems, Inc.
 9 Townsend West
 Nashua, NH 03063
 USA
 PH: +1 866.477.3687

CANADA
 FLIR Systems, Ltd.
 3430 South Service Road, Suite 103
 Burlington, ON L7N 3J5
 Canada
 PH: +1 800.613.0507

www.flir.com
 NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. Created 08/13/20

20-1061-INS



The World's Sixth Sense®